



Component Checklist

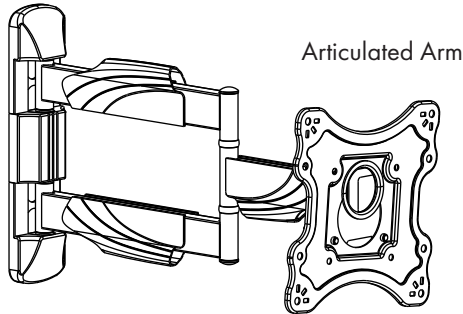

Tools Required

- Power Drill
- Phillips Head Screwdriver
- 4.5mm ($\frac{3}{16}$ ") Drill Bit
- 10mm ($\frac{3}{8}$ ") Masonry Drill Bit
- Spirit Level

Display Mounting Hardware

DM-A	DM-B	DM-C	DM-D	DM-E	DM-F
M4x16/30 (x4 each)	M5x16/30 (x4 each)	M6x16/30 (x4 each)	M8x16/30 (x4 each)	M5 Washer (x4 each)	M8 Washer (x4 each)

Wall Mounting Hardware

WM-A	WM-B	WM-C
Coach Screw (x4 each)	Nylon Anchor (x4 each)	M6 Washer (x4 each)

DM-G	DM-H	DM-I
M8 x 5mm Spacer (x8 each)	M8 x 15mm Spacer (x4 each)	Spanner

IMPORTANT INFORMATION

! IMPORTANT - Install TH-1040-VFL Small-Medium TV Articulated Arm as per the Installation Instructions

! This product supports a maximum load of 35kg (77lbs).


! This product supports VESA mounting hole configurations: 100mm x 100mm, 100mm wide x 150mm high, and 200mm x 200mm.

! The manufacturer accepts no responsibility for incorrect installation.

Step 1. Check Components


Check you have received all parts by comparing supplied parts against the Component Checklist and Hardware lists above.

Step 2. Remove VESA Plate, Cable Clips, and Wall Mount Covers.

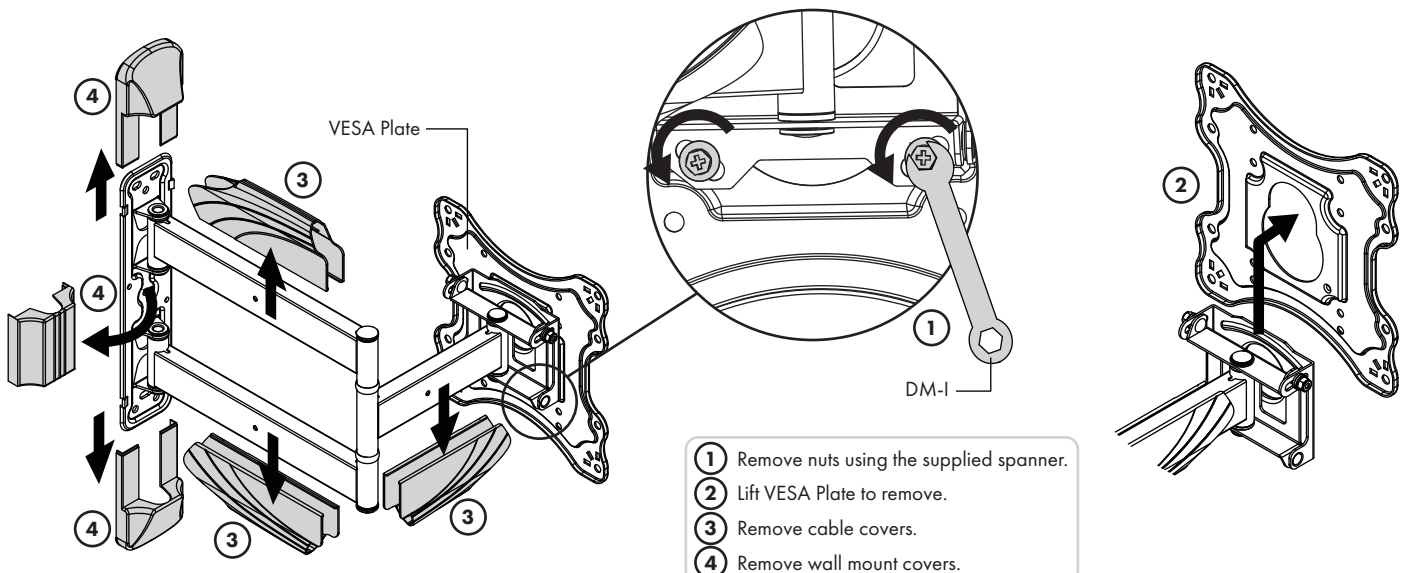


Step 3. Attach Tilt Brackets to Screen

Masonry Wall

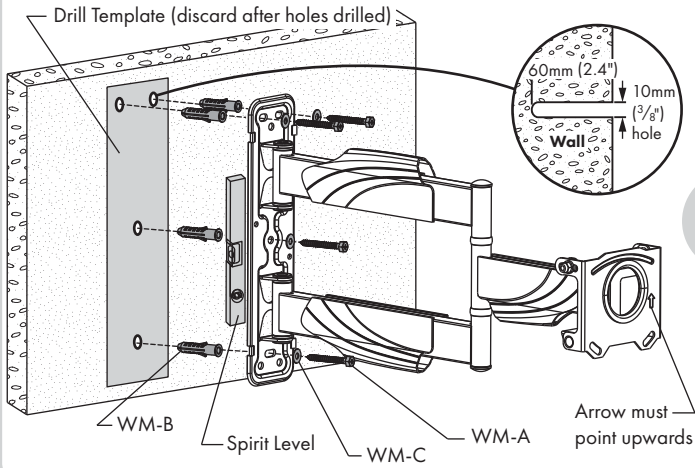


Timber Stud Wall

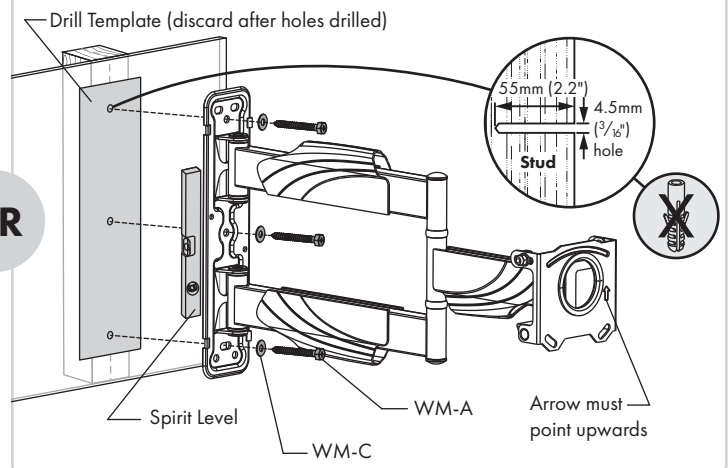


OR

Step 4. Reattach Wall Mount Covers

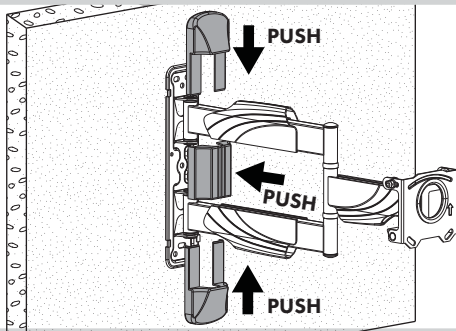


Step 5. Attach VESA Plate to Display

Choose mounting hardware and hole pattern to match your display

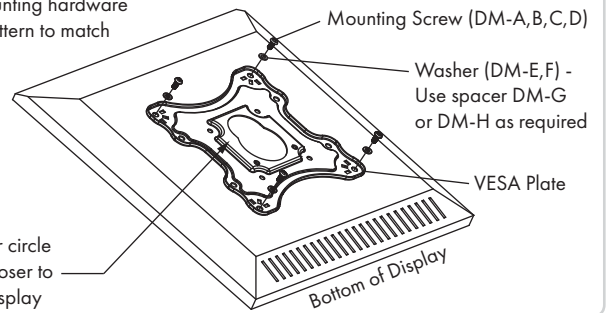


Note: Larger circle should be closer to bottom of display


Step 6. Attach Display to the Arm

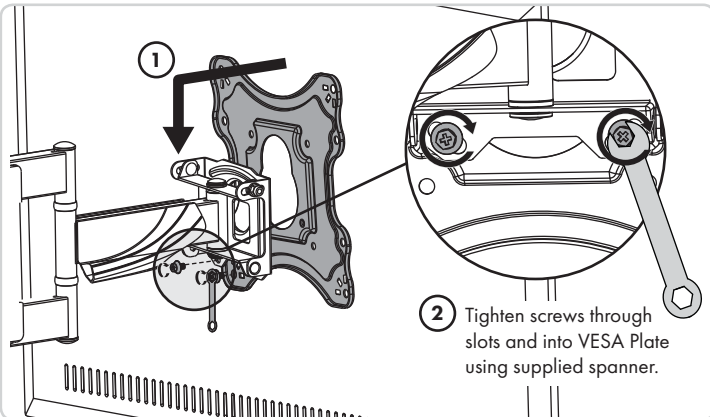


Step 7. Cable Management

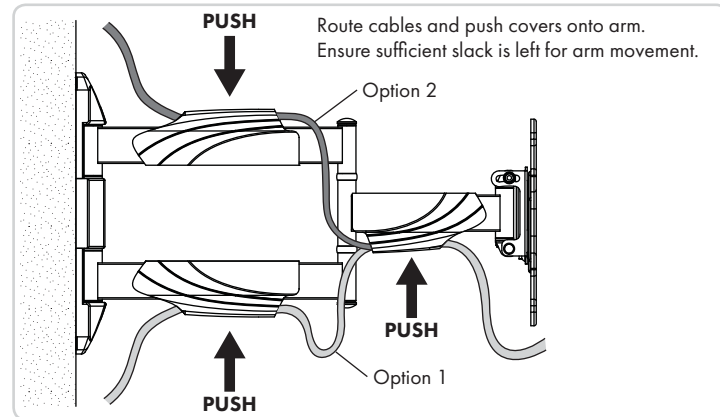

Step 8. Horizontal Adjustment

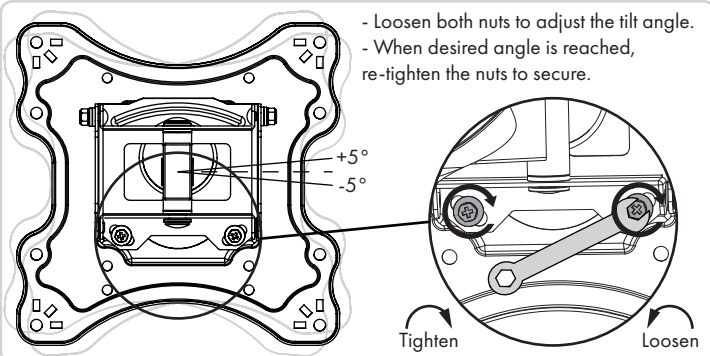

Step 9. Tilt Adjustment

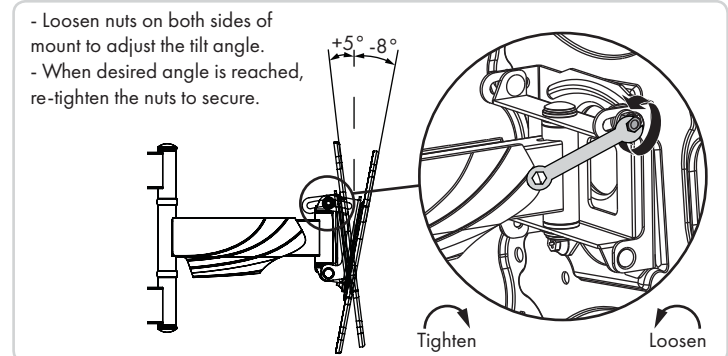

Installation Complete